

A M E R I C A N C R E S C E N T

ELEVATOR MANUFACTURING

Phone: 1-800-748-9711 Web: Americancrescent.com

Residential Elevator Quote / Order Form

Order Purchase Order Number _____

Quote Request

Distributor Name		Date	
Address	City	State	Zip
Phone	Fax	Contact Name	Email
Project Name			
Address	City	State	Zip

SHIPPING INFORMATION









Ship to: Distributor Address Project Address Hold at terminal for Pick-up
 Shipping Charges: Freight Collect Freight Third Party Billing

Specify Name of Preferred Carrier	Call 24 hours in advance	Contact Name
-----------------------------------	--------------------------	--------------

IMPORTANT! Please complete all of the above information to insure proper handling of your order.

Elevator Type: Elite Winding Drum Below Elite Winding Drum Above Regal Roped Hydraulic
 Elite Pitless
 Winding Drum Below
 Winding Drum Above

Hoistway Plan and Guide Rail Location:

<input type="checkbox"/> In-Line Style A with Right Hand Rails				
	STYLE A RIGHT HAND	STYLE A LEFT HAND	STYLE B REAR	STYLE B REAR
<input type="checkbox"/> Opposite Style C with Right Hand Rails				
<input type="checkbox"/> Opposite Style C with Left Hand Rails			STYLE D LEFT HAND	STYLE D RIGHT HAND
<input type="checkbox"/> Opposite Style D with Right Hand Rails				
<input type="checkbox"/> Opposite Style D with Left Hand Rails				

Number of Stops: _____

Number of Openings: _____

Floors Served: Total Travel _____
 Height from Basement to First Floor _____
 Height from First to Second Floor _____
 Height from Second to Third Floor _____
 Height from Third to Fourth Floor _____

NOTE: Minimum travel distance between floors is 24 inches.

General Data:

Clear Overhead _____ 8 feet minimum required for Standard 80" Elite below and Regal
 9 feet minimum required for Standard 80" Elite above

Pit Depth (8" minimum) _____ Overhead increases relative to cab size.

- Power Supply: 220 Volt, single phase Cycle: 60 Hz
 230 Volt, single phase 50 Hz
 240 Volt, single phase 50 Hz requires 10-12 week lead time
 208 Volt, single phase (requires buck boost transformer)

Machine Location:

- Adjacent to guide rails at _____ floor
 Overhead (Elite Only)
 Remote at _____ Floor _____ Feet from hoistway

NOTE: Adjacent machine at the top floor may require additional overhead.

Cab Size & Hoistway Dimensions: Width x Depth (clear inside dimensions) 36" x 48" is standard cab size

	Car Size	Finished Hoistway Requirements			
		In-Line Style A	In-Line Style B	Opposite Style C	Adjacent Style D
<input type="checkbox"/>	30" x 42"	46" x 50"	N/A	46" x 52"	44 3/4" x 54"
<input type="checkbox"/>	36" x 48"	52" x 56"	N/A	52" x 58"	50 3/4" x 60"
<input type="checkbox"/>	36" x 60"	52" x 68"	N/A	52" x 70"	50 3/4" x 72"
<input type="checkbox"/>	40" x 54"	56" x 62"	N/A	56" x 64"	N/A
<input type="checkbox"/>	48" x 36"	N/A	58" x 50 3/4"	N/A	N/A
<input type="checkbox"/>	60" x 36"	N/A	70" x 50 3/4"	N/A	N/A
<input type="checkbox"/>	42" x 60" **	58" x 68"	N/A	58" x 70"	N/A

** Check with local code compliance - exceeds ANSI A17.1 standards

Cab Height:

- 84" Standard 90" 95" maximum Other _____


Custom cab heights require additional overhead clearance

Cabs & Panel Selections:


Sierra Cab - Standard

- Fusion Maple melamine Walnut melamine White melamine
- Mahogany melamine Unfinished Oak veneer Unfinished Birch veneer

Executive Cab (includes clear lacquered finish, bronze fixtures, cab trim, flat handrail and phone box)



4 Panel




Premier 4 panel with elliptical panels


Wall Material:

- Ash Oak Cherry Maple Walnut Mahogany

Plantation Cab (includes high gloss white painted finish, bronze fixtures, cab trim, flat handrail and phone box)




4 Panel




Premier 4 panel with elliptical panels

Presidential Cab (includes clear lacquered finish, bronze fixtures, cab trim, flat handrail, phone box and frame for window)

Glass or mirror by others



4 Panel




Royal Presidential 4 panel With Bronze Mirror

Wall Material:

- Ash Oak Cherry Maple Walnut Mahogany

Royal Presidential 4 Panel Cab w/Bronze Mirror & Elliptical Panels

(includes clear lacquered finish, bronze fixtures, cab trim, flat handrail, phone box)

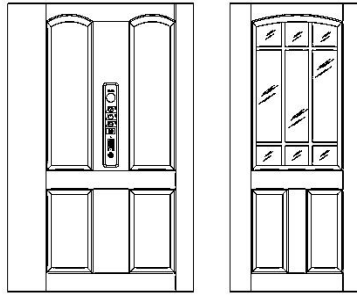

Wall Material: Ash Oak Cherry Maple Walnut Mahogany

Traditional Cab (custom laminates available from Wilsonart's standard selection:

Color Number: _____

Cab Options:

- Hand finished oak or birch veneer cab panels (stained or clear coat): Sierra Cab Only
- Hand finished veneer cab floor (stained or clear coat): Sierra Cab Only
- Frame for glass insert(s) (1/4" safety glass above handrail by others) No. Req'd _____
- Bronzed aluminum package, #4 satin polish finish (includes fixtures, handrail and cab trim)
- Antiqued bronze aluminum package, #4 satin polish finish (includes fixtures, handrail and cab trim)
- Kick plates Bronze or Stainless Steel

Ceiling Options:

- White melamine (standard)
- Unfinished oak veneer
- Unfinished birch veneer
- Raised panel in: Ash Oak Cherry Maple Walnut Mahogany

Hardwood Floor Options:

Hardwood Floor in: Ash Oak Cherry Maple Walnut Mahogany

Lighting:

Additional recessed ceiling lights (two are standard) No. Req'd _____

Additional Handrail Options:

- Clear aluminum – 1 1/2" dia. No. Req'd _____
- Bronzed aluminum – 1 1/2" dia. No. Req'd _____
- Antiqued bronzed aluminum – 1 1/2" dia. No. Req'd _____
- Solid oak No. Req'd _____

Cab Gates:

- LiteView with 3/ clear center panels (standard)
- LiteView with 3/ smoked center panels
- LiteView with all solid panels
- LiteView with all clear center panels and clear aluminum trim
- LiteView with all clear center panels and gold anodized aluminum trim
- Power operator(s) for LiteView folding cab gate No. Req'd _____


Pushbutton Stations:

- Key on/off switch in the in-car station
- Key on/off switch in the hall stations
- "Car here" light in the hall stations
- Digital position indicator in the in-car station
- Digital position indicator in the hall stations


Miscellaneous:

- Extra bronze hall station (required when number of openings exceed number of stops) No. Req'd _____
- Extra stainless steel hall station (required when number of openings exceed number of stops)
- Spring buffers (12" pit required)
- Two piece hydraulic jack (must be welded together in the field)
- Export crating
- Pipe rupture valve
- Replacement packing for cylinder (recommend replacing after installation is completed)

Door Swings:

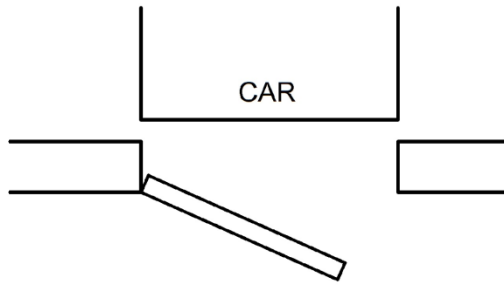

RIGHT HAND ENTRANCE

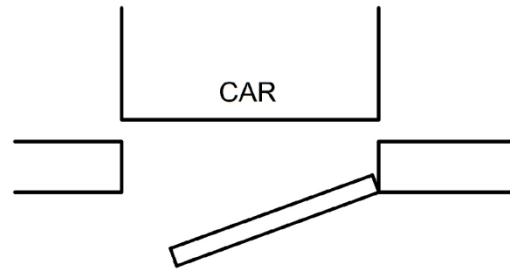

LEFT HAND ENTRANCE

	FRONT ENTRANCE		REAR ENTRANCE		SIDE ENTRANCE	
	Left Hand	Right Hand	Left Hand	Right Hand	Left Hand	Right Hand
Basement						
First Floor						
Second Floor						
Third Floor						
Fourth Floor						

Interlocks:

- Honeywell Extra Honeywell interlock (required when number of openings exceed number of stops)
- GAL Type "N" Extra GAL interlock (required when number of openings exceed number of stops)

Power swing door operator(s): (hoistway doors by others)

- Basement
- First Floor
- Second Floor
- Third Floor
- Fourth Floor

Notes:

WAIVE APPROVAL PROCESS

I hereby authorize American Crescent Elevator to manufacture this unit per the information submitted on the SITE DATA SHEET. I understand that the final drawings will be submitted based on this information. However, **I wish to waive the approval process**, furthermore, I understand that no changes can be made to this order once it is release to production.

Signature		Date	
------------------	--	-------------	--