



57 South Commerce Way #300, Bethlehem PA 18017  
(610) 443-2282

## Roped Driven DUO Homelift Layout Drawing Submittal

Customer: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Contact: \_\_\_\_\_

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_


**The Liftinstituut B.V., an accredited ANSI AECO, has certified the elevator system meets the requirements of the ASME A17.7-2007 / CSA B44.7-07 per certificate no. NA17-0842-1004-026-01 revision no. 2.**

**The DUO Homelift complies with NFPA 70 NEC 2014 / CSA C22.1.**



The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE	
Drawn Wagon Wang	Date 07/11/2018	DUO Homelift Title Page	
 DIMENSIONS IN MM UNLESS OTHERWISE NOTED THIRD ANGLE PROJECTION - AS 1100		A4	Dwg No LAYOUT. 01
		SCALE:	PAGE 1 OF 12

**GENERAL DATA**

Type:	DUO Homelift
Capacity:	375 lbs.
Speed:	21.7 ft/min
Maximum travel:	13.12 ft
Car floor area:	5.167 sq ft
Landings:	2
Car entrances:	1 in-line
Operation:	Constant pressure

**LIFT WEIGHT**

Hoist unit (machine room above car):	220.5 lbs.
Car body:	143.3 lbs.
Total empty lift:	363.8 lbs.

**SUSPENSION ROPES**

Manufacturer:	Pfeifer Drako
Type:	Drako 7 x 19 WSC (Mil Spec 83420)
Dimensions:	0.2362 in (6mm)
Min. breaking force:	29,0 kN

**GUIDE RAILS**

Manufacturer:	Stiltz
Type:	Specific Aluminium Alloy (AA 6063) extrusion
Size:	Overall depth 7.165 in, width 3.756 in

**CAR**

Type:	Centrally guided, 1 entrance
Suspension:	2 ropes, drum
Walls:	Sides have full walls.
Door:	Manual operation swing full height doors.
Floor surface:	In accordance with clause 5.3.1.11
Apron minimum vertical height:	2.362 in
Handrail:	Included as standard

**APPLIED COMPONENTS**

Safety gear; manufacturer; type:	Stiltz, mechanical gripper plates and rods
Car door lock; manufacturer; type:	Stiltz (Kunshan) Limited, ES 20M
UL certificate:	102448987CRT-001

**MACHINE EQUIPMENT**

Manufacturer:	Nord Gear Ltd
Type:	SK9012.1-71L/4 DBR6 HL (Bevel gear unit)
Motor Power:	0.37 kW
Output Speed:	1380 / 14 rpm
Reduction:	02:37.4
Output Torque:	249 Nm
Brake torque; manufacturer:	5 Nm; Precima
Drum; manufacturer:	Taiyuan Kelitai Elevator Machinery Co. Ltd.
Material:	Cast Iron
Diameter:	7.087 in (180mm)
Diverter pulley; manufacturer:	YangZhou Sailerda Nylon manufacture Co. Ltd.
Material:	Nylon
Quantity:	2

**ELECTRICAL**

Main power:	220-1-60 HZ - 20 AMP
Signal voltage:	24 VDC
Emergency lowering system:	Battery 12 V - 7 AMP, with emergency lighting
PLC; manufacturer:	Mitsubishi
Type:	AL2-24MR-D
VFD; manufacturer:	Mitsubishi
Type:	FR-D720

**SIGNAL/SAFETY FEATURES**

Landing controls:	Remote transmitters hold-to-run buttons, with back lights
Car controls:	Hold-to-run call buttons, with back lights
On/off and reset switch:	Keyed on car operating panel
Emergency stop:	Push emergency stop switch with alarm siren
Emergency signalling device:	Two way voice communication telephone, to landline
Car indicator lights:	Over-speed, over-load, out-of-balance, bottom-top obstruction
Car Lighting:	LED strip lighting in ceiling and LED puck lighting cab floor
Top of car/machine room:	Load sensitive top plate above lift
Bottom of car:	Obstruction sensor pad at base of lift car


Car door contact;	Kronenberg, PZ 73
UL certificate:	20141104-SA34041
Machine brake; manufacturer;	Precima
UL certificate:	1478630



The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.





© Stiltz Ltd. 2018	TITLE	Specifications	
Drawn Wagon Wang Date 07/11/2018			
DIMENSIONS IN MM UNLESS OTHERWISE NOTED	A4	Dwg No LAYOUT.02	PAGE
THIRD ANGLE PROJECTION - AS 1100		SCALE:	2 OF 12

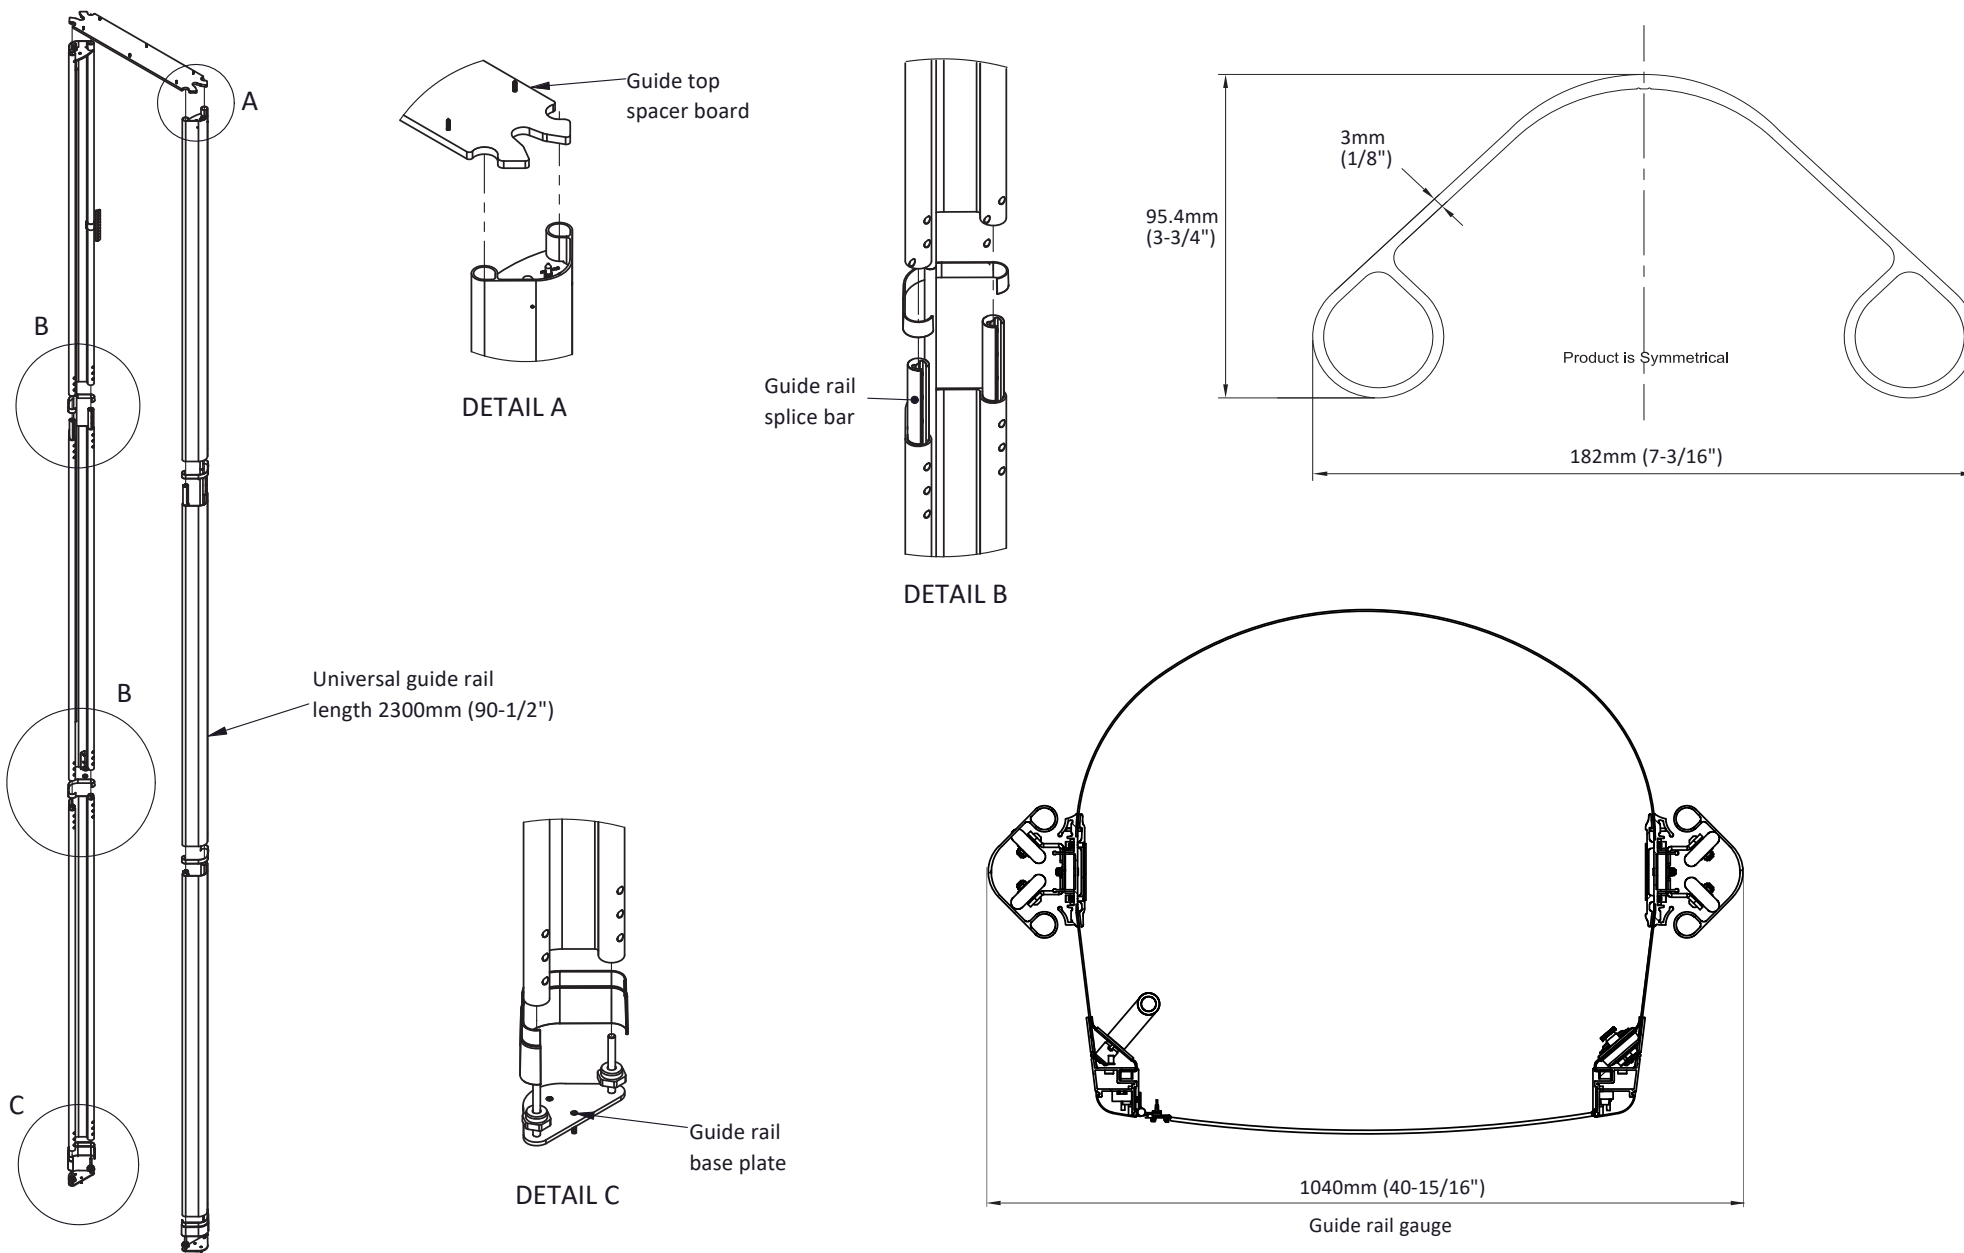


The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.




© <b>Stiltz Ltd.</b> <b>2018</b>		TITLE	
Drawn <b>Wagon Wang</b>	Date <b>07/11/2018</b>	<b>Guide Rail Support System</b>	
DIMENSIONS IN MM UNLESS OTHERWISE NOTED THIRD ANGLE PROJECTION - AS 1100		<b>A4</b>	Dwg No <b>LAYOUT. 03</b>
			PAGE <b>3 OF 12</b>
SCALE:			

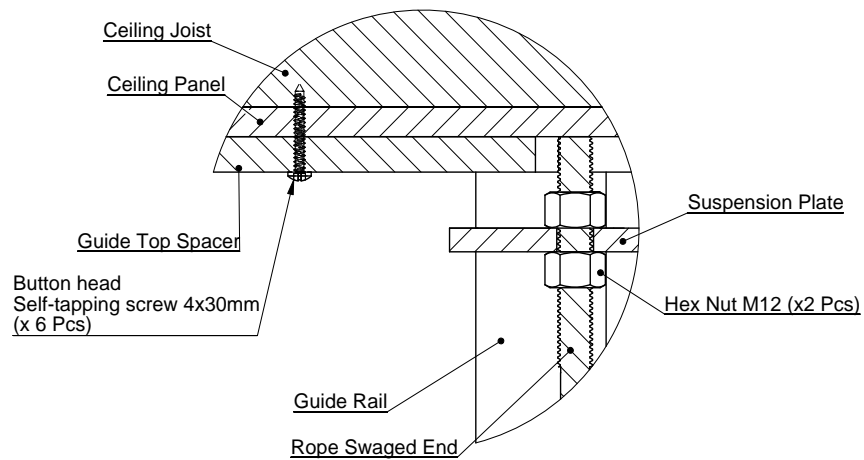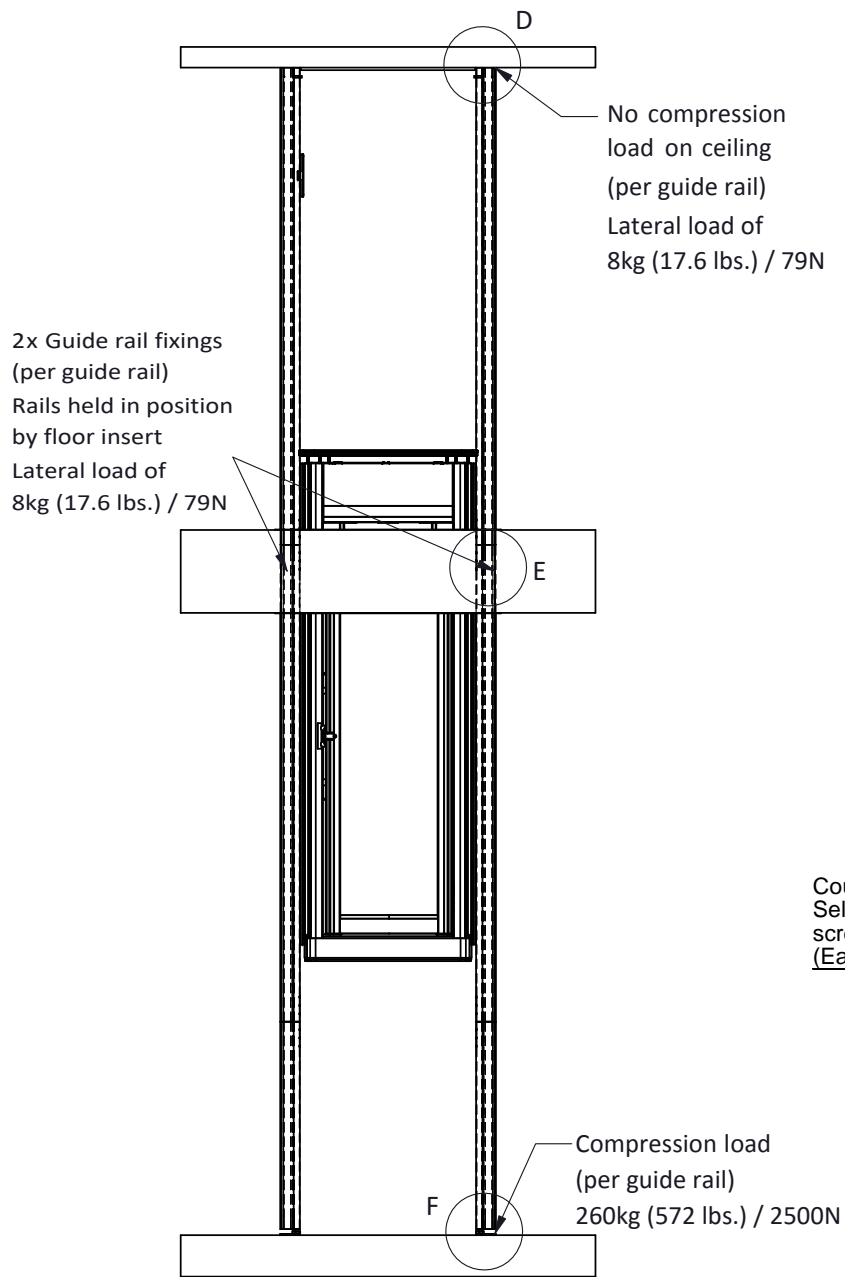

DETAIL D

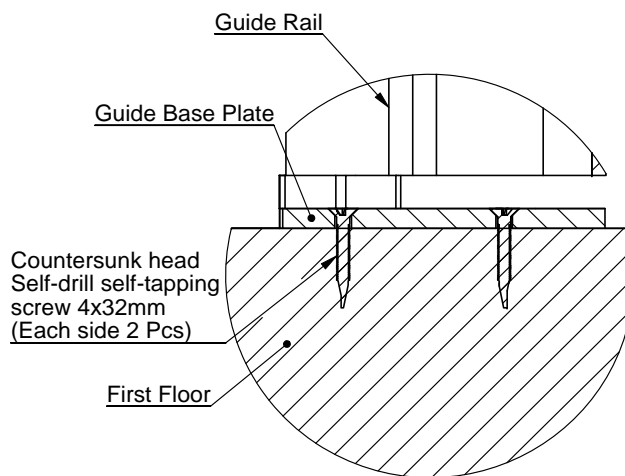

DETAIL F

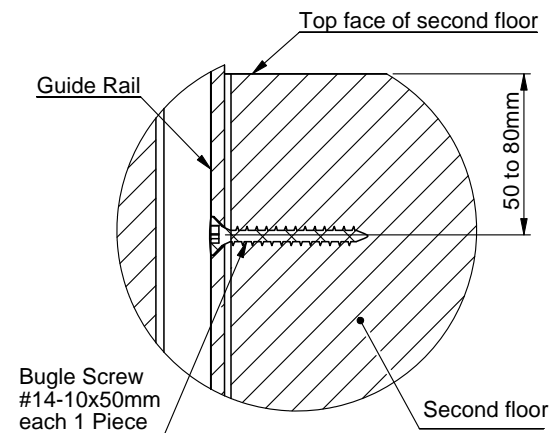


DETAIL E



The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE	
Drawn Wagon Wang	Date 07/11/2018	System Loads & Fixings	
THIRD ANGLE PROJECTION - AS 1100		A4	Dwg No LAYOUT. 04
DIMENSIONS IN MM UNLESS OTHERWISE NOTED			PAGE
		SCALE:	4 OF 12

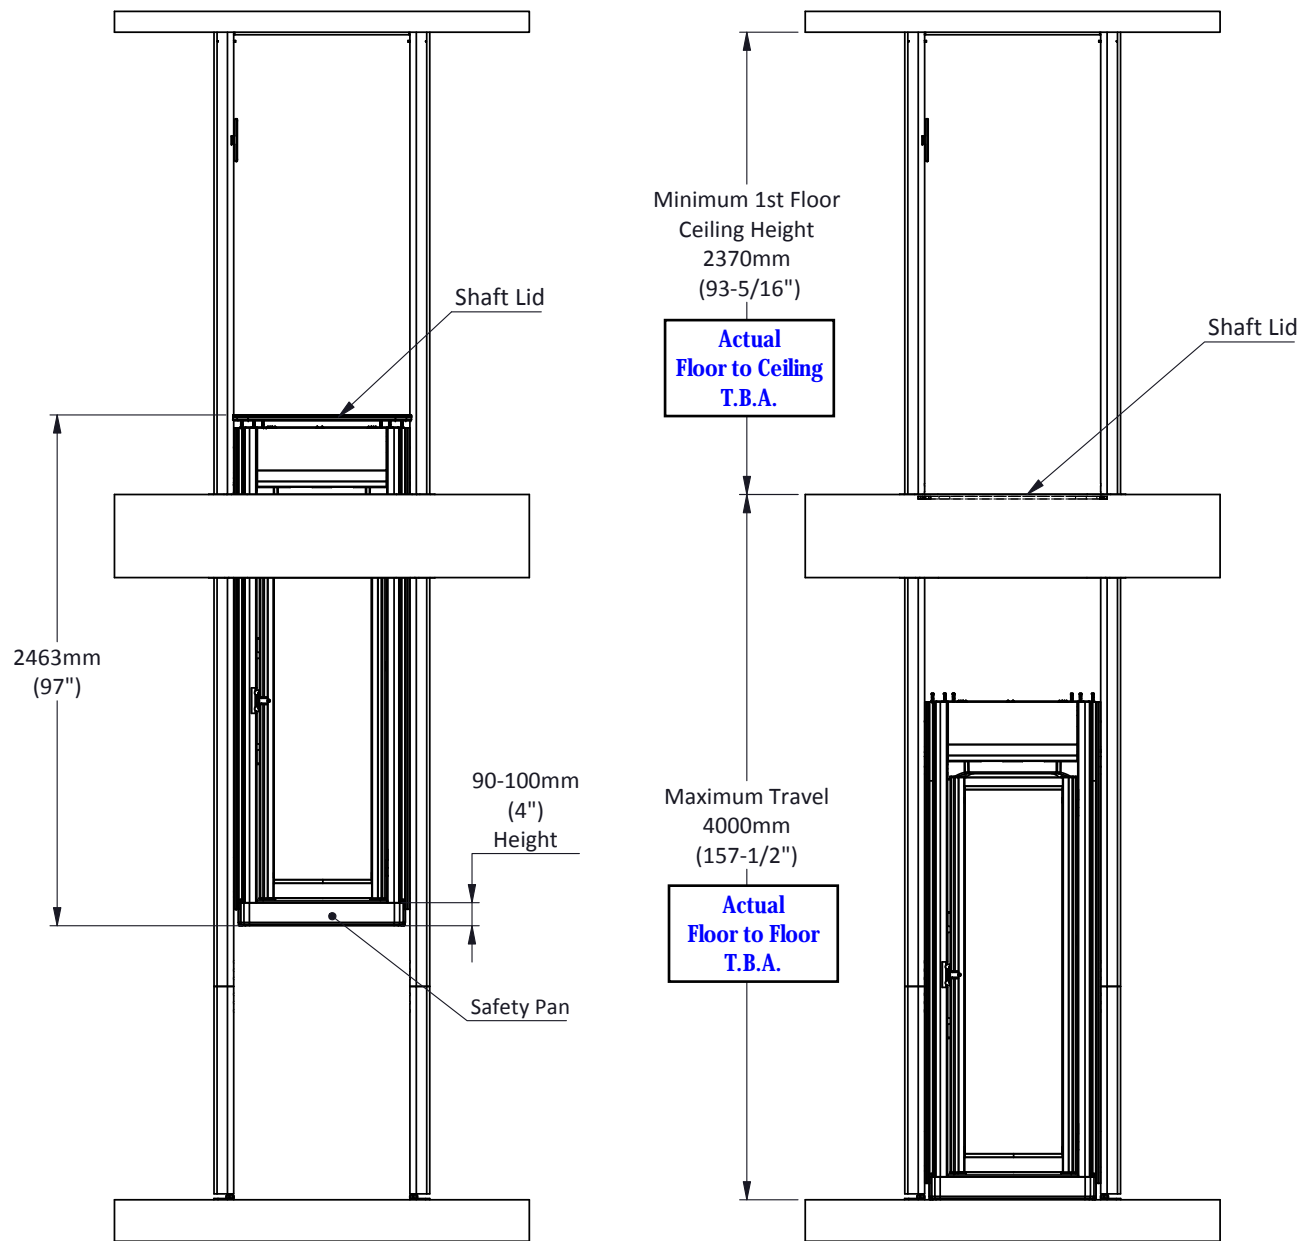

**A17.1.5.3-2013 / CSA B44-13 deviations:**

- (1) 5.3.1.3 – Insufficient car top clearance
- (3) 5.3.1.16.2.j – Top of car


The top of the mechanical hoist enclosure, which is positioned on top of the lift car, is equipped with; (i) a fixed protection panel; (ii) six micro switch limits; (iii) an extreme upper limit switch; and (iv) in most cases the shaft lid.






The fixed protection panel will prevent penetration into the hoist enclosure, but is not designed to be stood on. Signage is installed to inform and remind people not to stand on top of the lift. A micro switch will activate, and stop the lift, if the protection panel is removed. In addition, the shaft lid that protects the second floor opening (from falling hazard) travels on top of, and protects, the car top mounted hoist unit. A wire rope clamp and locking mechanism is fitted to the shaft lid preventing removal.

The main switch to disconnect all power to the hoist, is located just below the protection panel. This allows the hoist to be disabled from about the lift cab, and therefore the lift cannot travel in either direction electrically.

The six micro switches and extreme upper limit switch (absolute final limit) will activate when depressed. So if any top clearance risk occurs, the person/s can depress any one of the six micro switches or extreme upper switch and the lift will stop moving upwards immediately. If the extreme upper limit is activated, the reset button (adjacent to the extreme upper limit) will be depressed to move the lift downwards.

In addition, signage is installed to inform and remind people of the low head height clearance above the lift car.

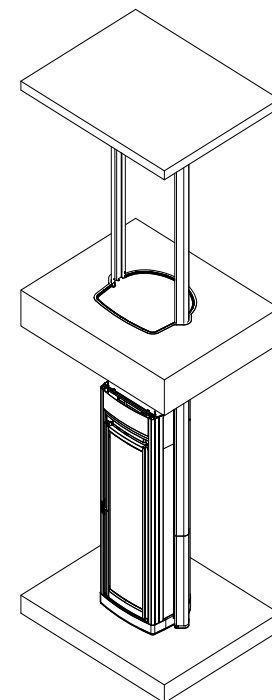


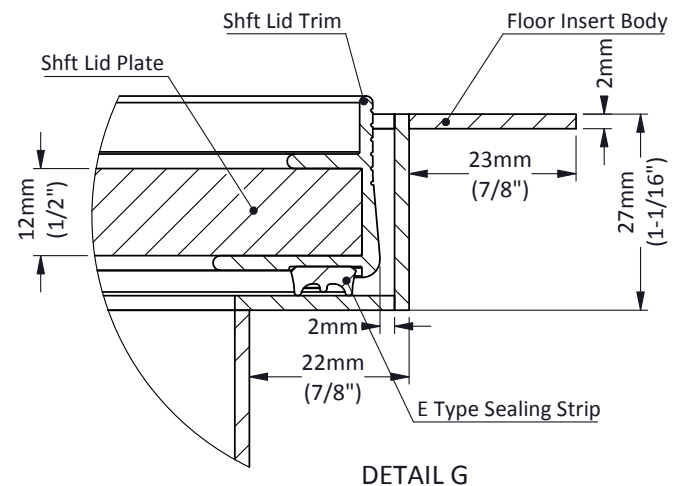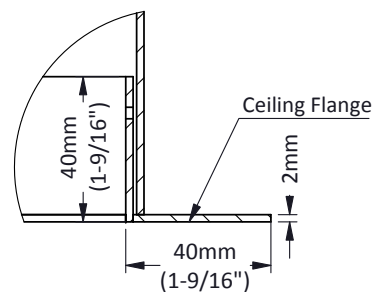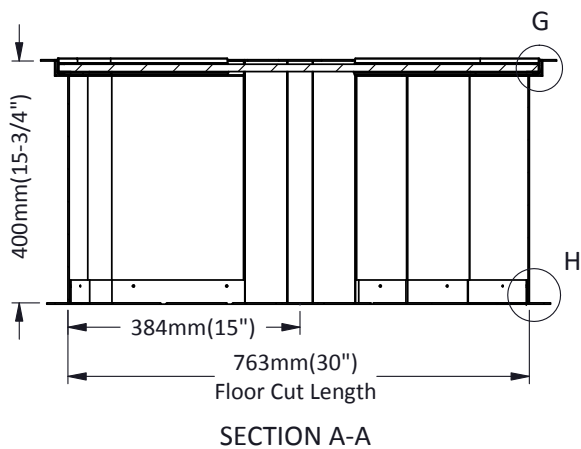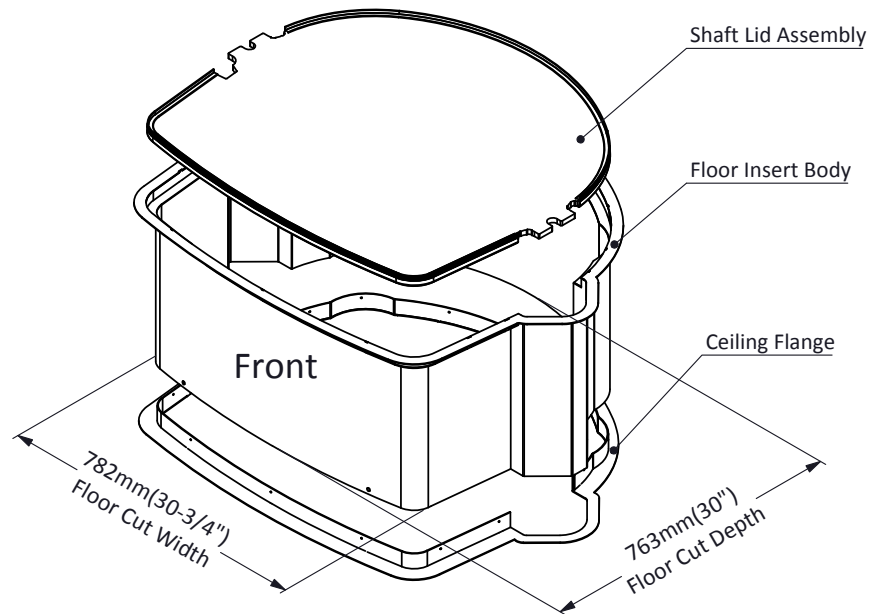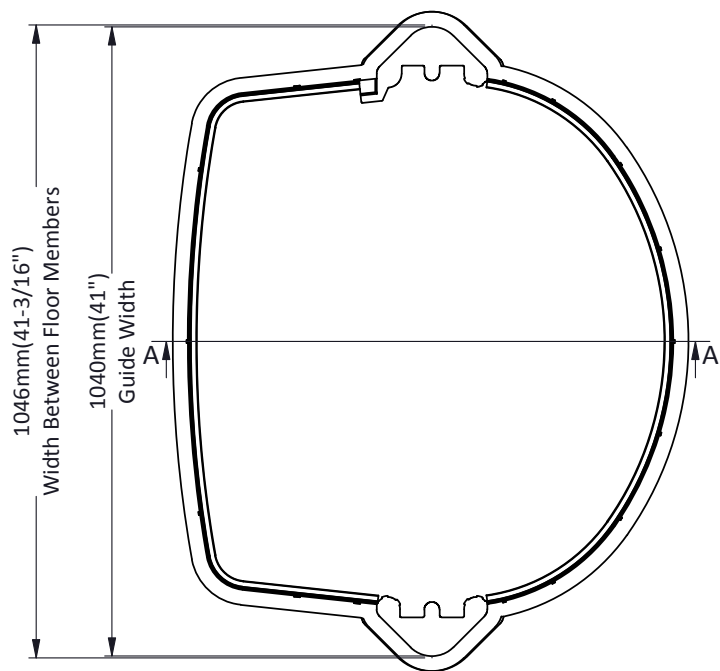

The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE Floor Insert & Shaft Lid Assembly	
Drawn Wagon Wang	Date 07/11/2018	A4	Dwg No LAYOUT.06
THIRD ANGLE PROJECTION - AS 1100			SCALE:

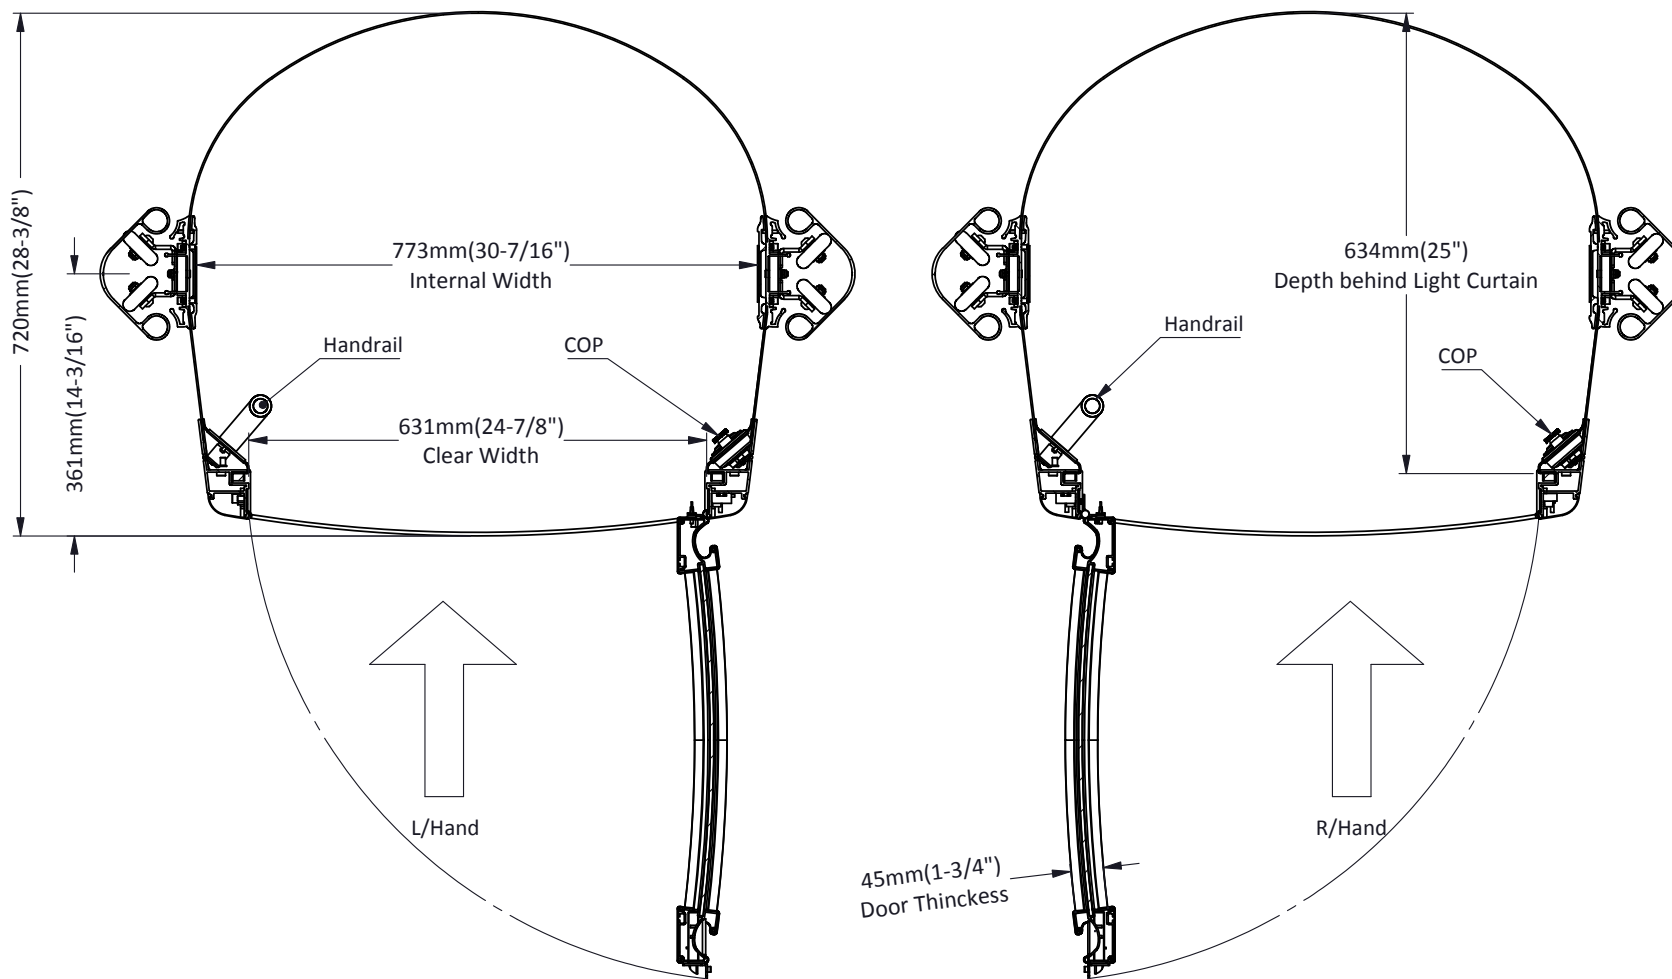


The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE	
Drawn Wagon Wang	Date 07/11/2018	Platform Layout & Area	
 THIRD ANGLE PROJECTION - AS 1100		DIMENSIONS IN MM UNLESS OTHERWISE NOTED	
A4	Dwg No LAYOUT.07	PAGE	
SCALE:		7 OF 12	

PRINT MAY BE REDUCED - DO NOT SCALE.

Item #	Part Name	Qty
1	Duo Guide Roller Assembly	1
2	Hoist Swivel Rocker Beam AS Assembly	1
3	Lift Wire Rope 6m Assembly	2
4	LD AS Motor Cover Plate Assembly	1
5	LD ASME Electrical Panel Electrical	1
6	Nord Floating Switch Bracket	1
7	Nord Floating Striker bracket	1
8	Count Sensor Mount Bracket	1
9	LD ASME Main Switch Assembly	1
10	ASME Nord GearBox Motor 370W N1	1
11	Lead Acid Battery AS 12V	1
12	MW Inverter Mount Bracket Assembly	1
13	Cast Iron Rope Drum 200 Assembly	1
14	CTEK Battery Charger XS 0.8	1
15	LD ASME Hoist Frames Assembly	1
16	Rope Slack Activation Lever Set	1
17	ASME Battery Retainer Bracket	1
18	ASME Magnetic Working Limit Switch	2

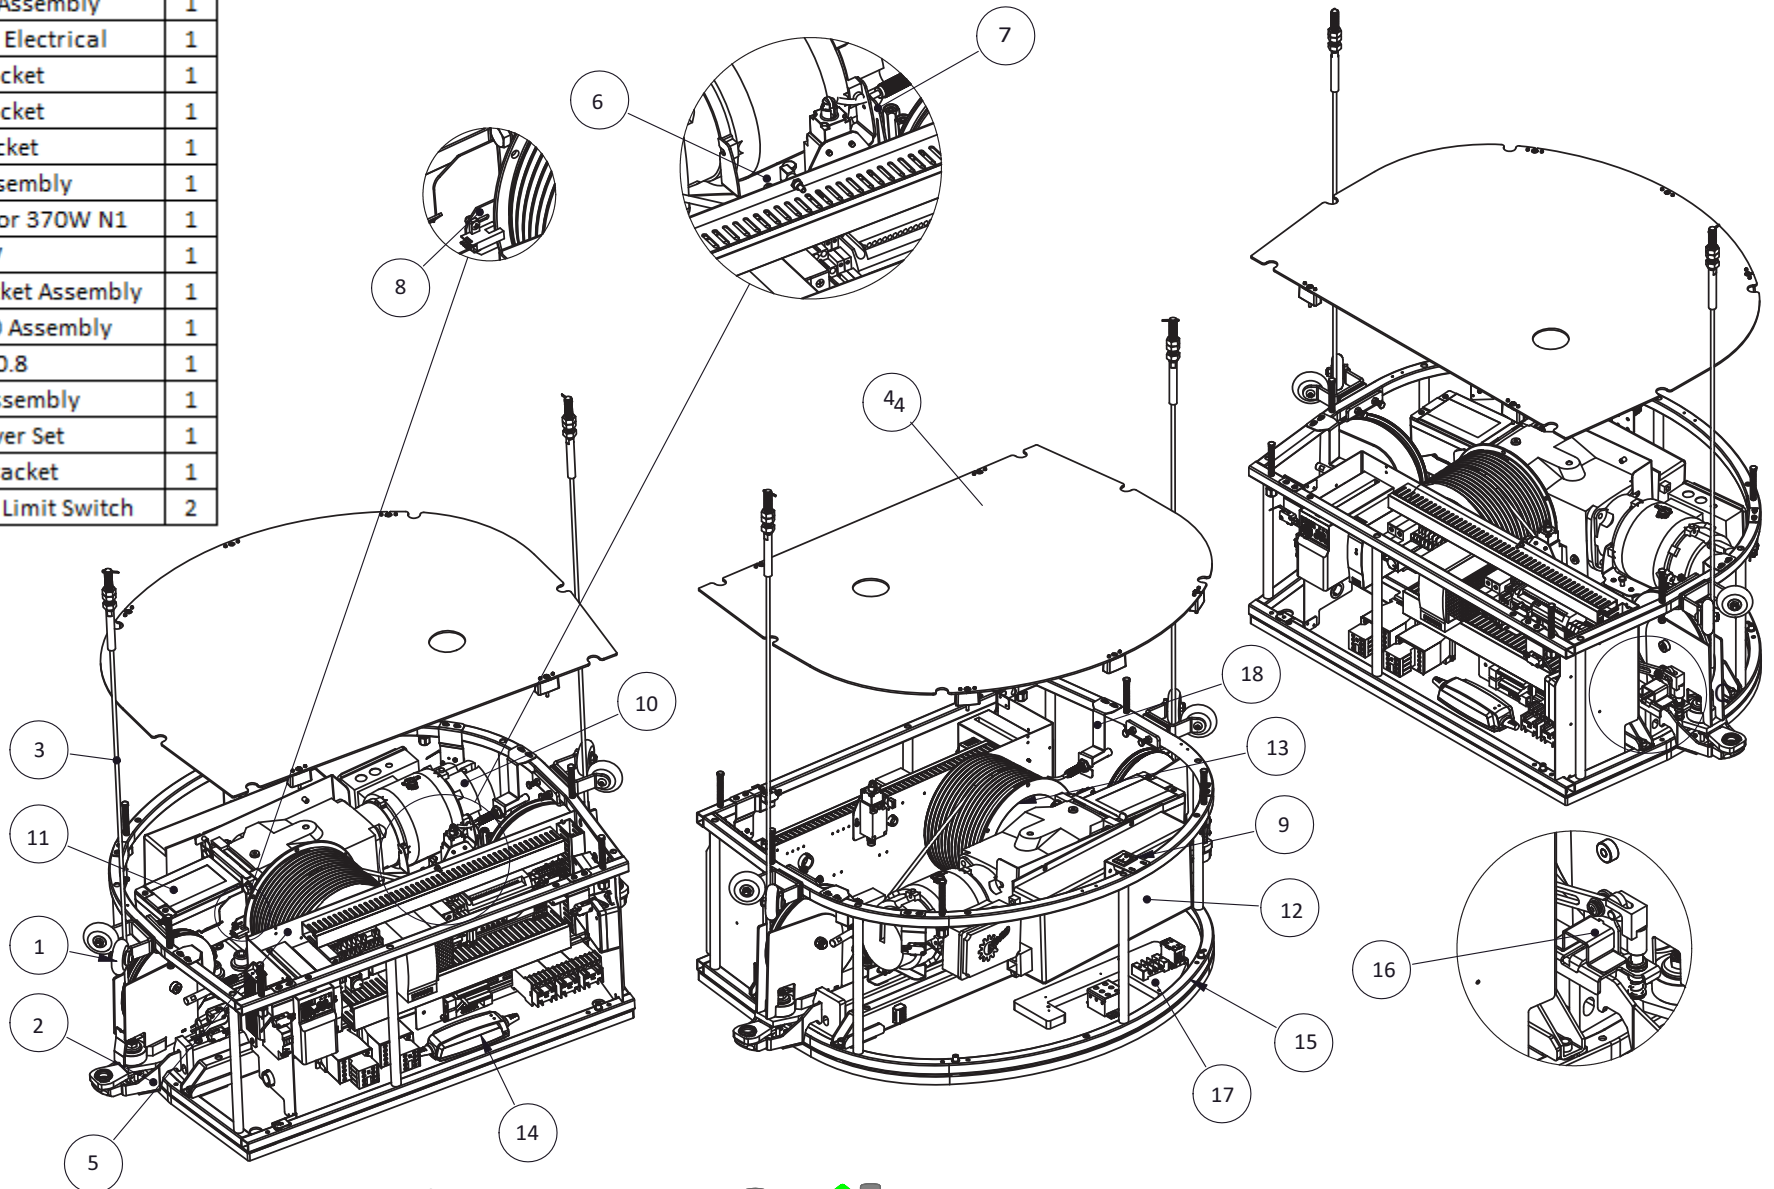


The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE	
Drawn Wagon Wang Date 07/11/2018		Top Mounted Machine	
DIMENSIONS IN MM UNLESS OTHERWISE NOTED THIRD ANGLE PROJECTION - AS 1100		A4	Dwg No LAYOUT.08
			PAGE 8 OF 12
		SCALE:	



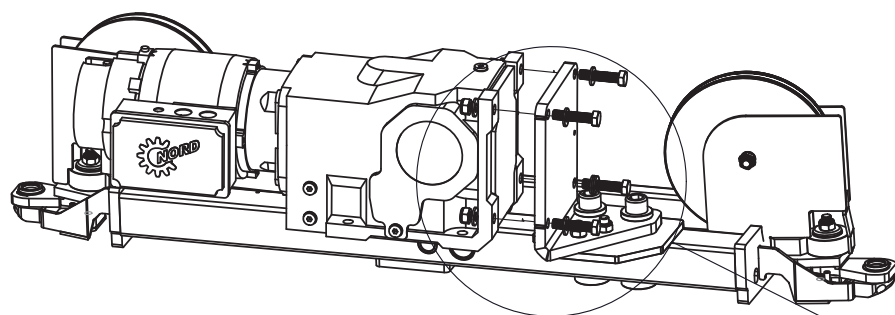


Hexagon Head Bolt M10x45mm(4 Pcs)  
P/N:30101-11058

Nylon Self-locking Nut M10(3 Pcs)  
P/N:30102-10018


Flat Wsher  $\varnothing 20 \times \varnothing 10 \times 2$ mm(9 Pcs)  
P/N:30103-10006

ASME Nord Gearbox Motor 370W N1 Assembly(1 Set)  
P/N:50102-00089

Cast Iron Rope Drum 200 Assembly(1 Set)  
P/N:50102-00087

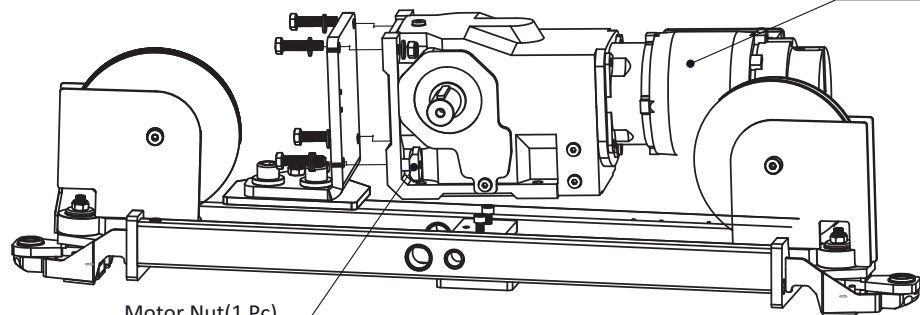

Motor Nut(1 Pc)  
P/N:35111-10017

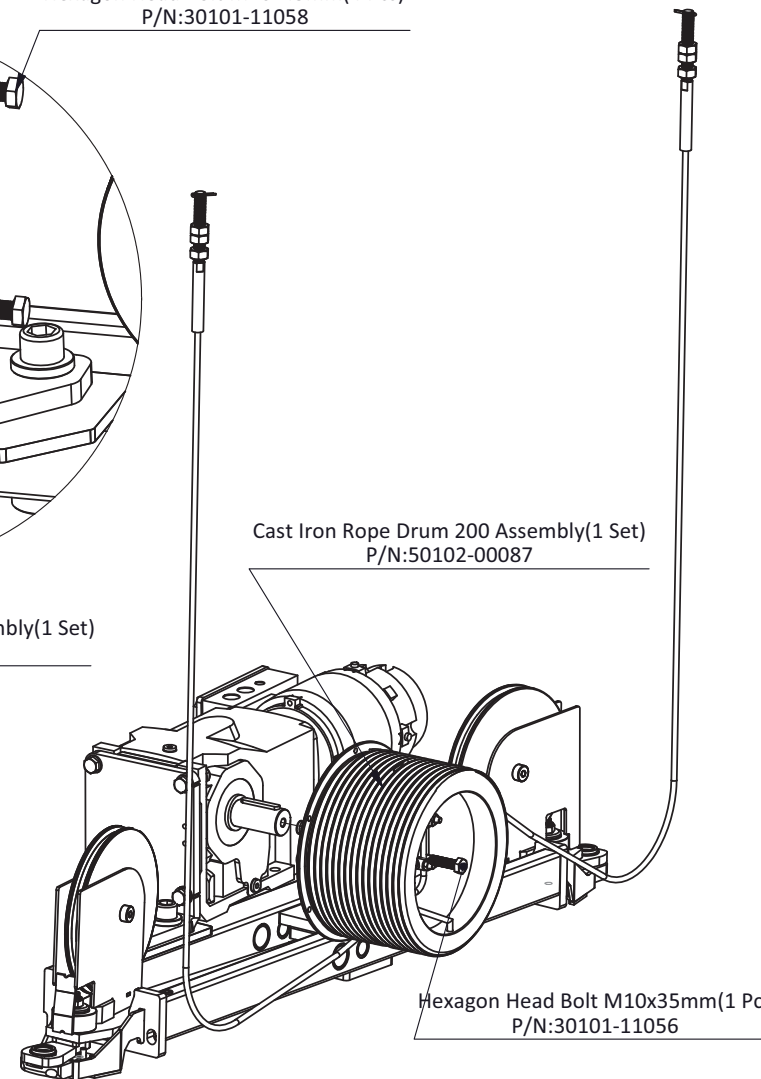


Hexagon Head Bolt M10x35mm(1 Pc)  
P/N:30101-11056



The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE	
Drawn Wagon Wang	Date 07/11/2018	Rocker Beam & Gearbox	
 THIRD ANGLE PROJECTION - AS 1100		DIMENSIONS IN MM UNLESS OTHERWISE NOTED	
A4		Dwg No LAYOUT.09	PAGE
SCALE:		9 OF 12	

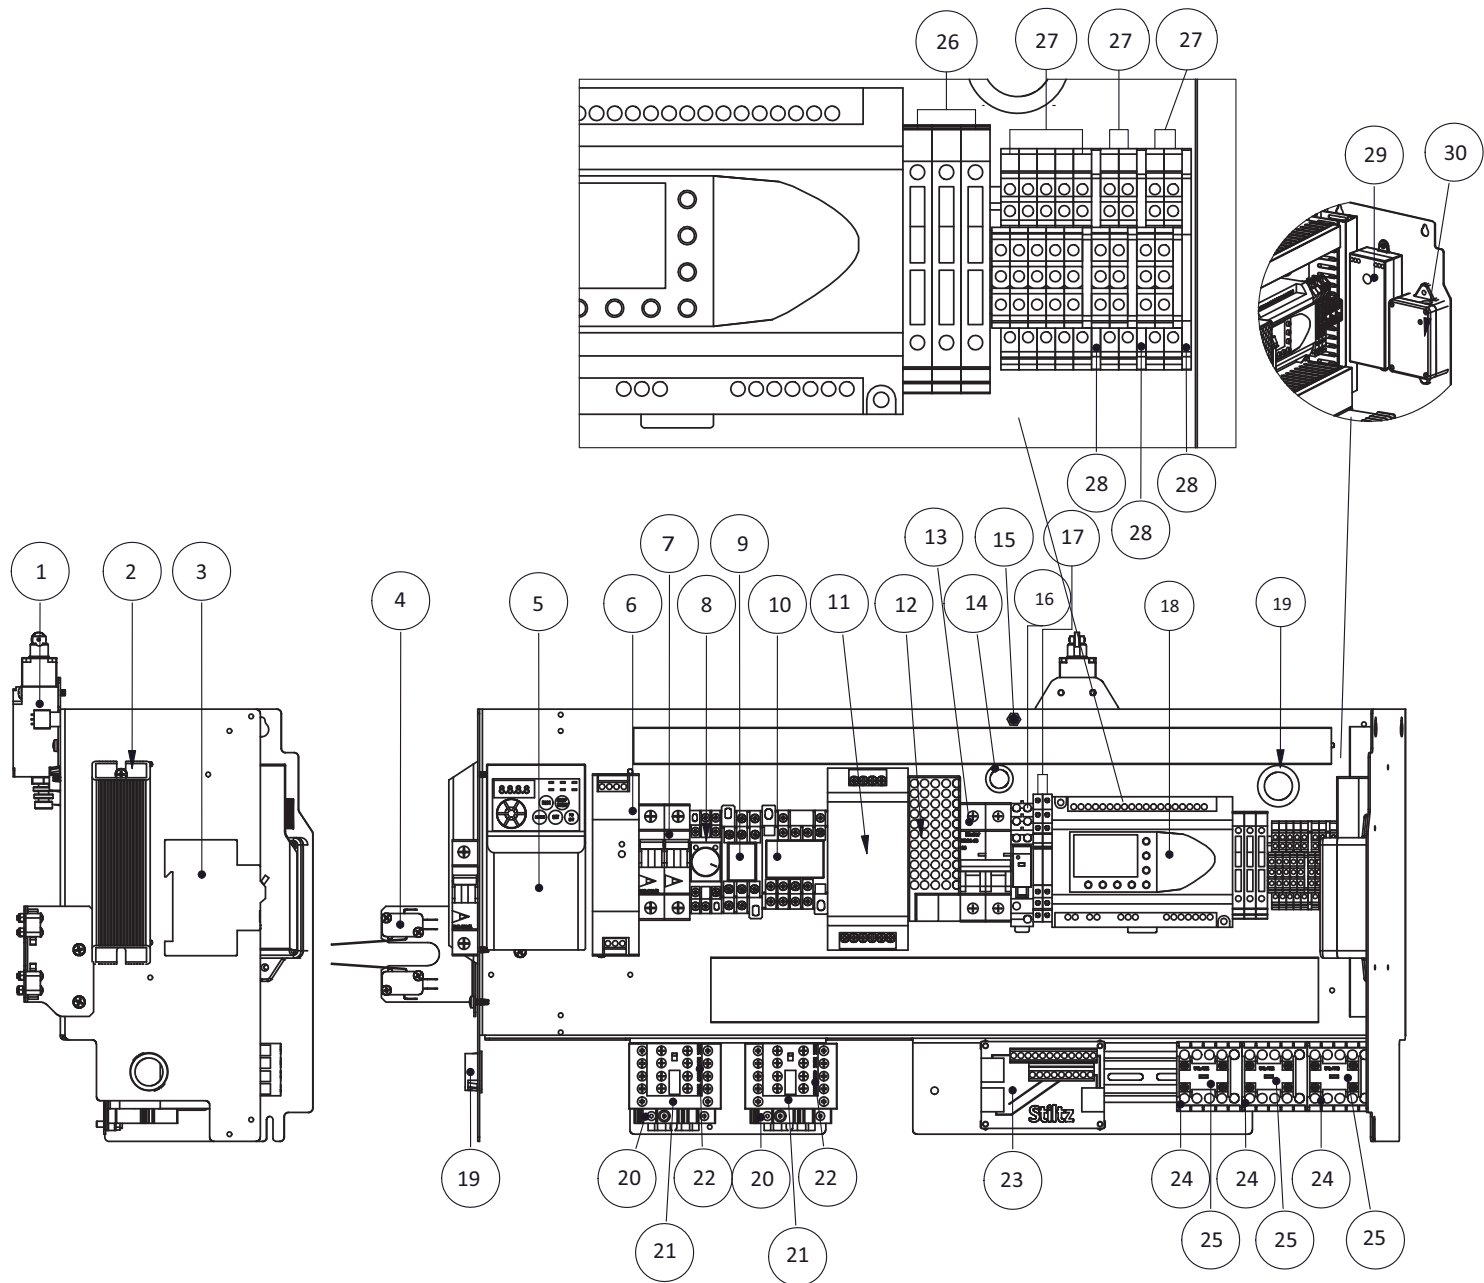

Item #	Part Name	Qty
1	Extreme Upper Limit Tag Switch Assembly	1
2	Brake Resister M1	1
3	Moeller Circuit Breaker C32/1 ML	1
4	ASME Balance Limit Bracket Assembly	1
5	Frequency Inverter M1	1
6	Power Supply 24V	1
7	Moeller Circuit Breaker C10/2 ML	1
8	Timer Relay	1
9	Relay AC220/240V	1
10	Relay AC200/220V	1
11	Redundancy Unit	1
12	DC12 to DC24V Converter	1
13	Nader Circuit Breaker	1
14	Cable Bush dia. 16 - Black	1
15	Limit Override Push Button Apemr2 8632A	1
16	Relay DC24V	1
17	Mini Relay (With Base)	2
18	PLC	1
19	Cable Bush dia. 26 - Black	2
20	Terminal End Clamp S1	2
21	Moeller Contactor	2
22	Moeller Contactor Contact	2
23	Car Control PCB Assembly	1
24	Mitsubishi Contactor (1NC)	3
25	Mitsubishi Contactor Contact	3
26	Fuse Terminals	3
27	Two Level Terminal	9
28	Terminal End Plate	3
29	Light Curtain Controller	1
30	Remote Control Receiver Assembly	1



The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE	
Electrical Panel Layout		A4	
Drawn Wagon Wang	Date 07/11/2018	Dwg No LAYOUT.10	PAGE
THIRD ANGLE PROJECTION - AS 1100		SCALE:	10 OF 12

A17.1.5.3-2013 / CSA B44-13 deviation:  
(2) 5.3.1.16.2.i – Manual operation

The electrical safety lowering system is equipped with redundant power supply, so that the lift can disconnect itself from the main power and verify that the safety relay MR is in fact operational and available in the event of a power failure. The lowering system can be used in lieu of a manually operated system and has been confirmed as being suitable by the Liftinstituut. The electrical emergency operation is superior (to mechanical release), it allows any trapped occupant to be released from the LCU (car) in a short amount of time. Rather than time delays to the occupant waiting for elevator personnel to mechanically lower the LCU (car) from outside the lift.

The battery backup system will automatically switch from main power to emergency power, when power is lost. And return to main power when main power is re-established.


The battery backup system is self-checking and verifies its availability by checking the system two consecutive times between 1 AM and 1:30 AM each Sunday morning.

Vertical position approx.  
150mm (6") below first  
floor ceiling  
Horizontal position no  
more than 100mm (4")  
outside the guide rail gauge

Min. width  
access to  
main line  
disconnect  
762mm (30")

Note min. standing room  
in front of main line  
disconnect 914mm (36")

Min. head  
clearance  
main line  
disconnect  
2000mm  
(78 3/4")

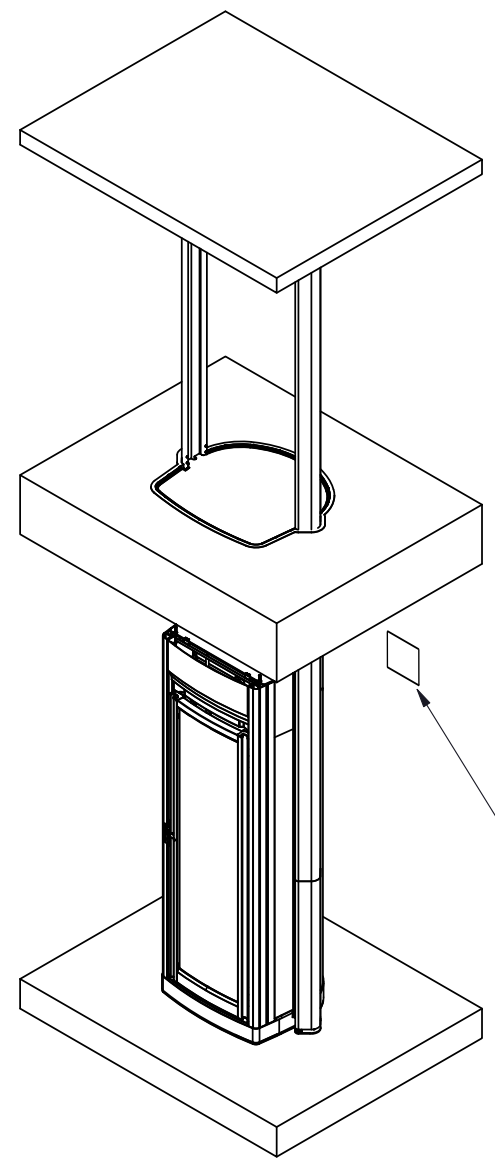

Main line disconnect and  
secondary disconnect  
incl. car lighting and  
emergency lowering  
Plus landline telephone

Car door lock; manufacturer; type:
Stiltz (Kunshan) Limited, ES 20M
Car door contact; manufacturer; type:
Kronenberg, PZ 73


Example main line disconnect  
30 Amp 240-Volt Fusible  
Indoor General-Duty Safety  
Switch  
PROVIDED BY OTHERS



The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018	TITLE	
	Main Line Disconnect	
Drawn Wagon Wang	Date 07/11/2018	A4
DIMENSIONS IN MM UNLESS OTHERWISE NOTED		
THIRD ANGLE PROJECTION - AS 1100		Dwg No LAYOUT. 11
		PAGE
		SCALE:
		11 OF 12

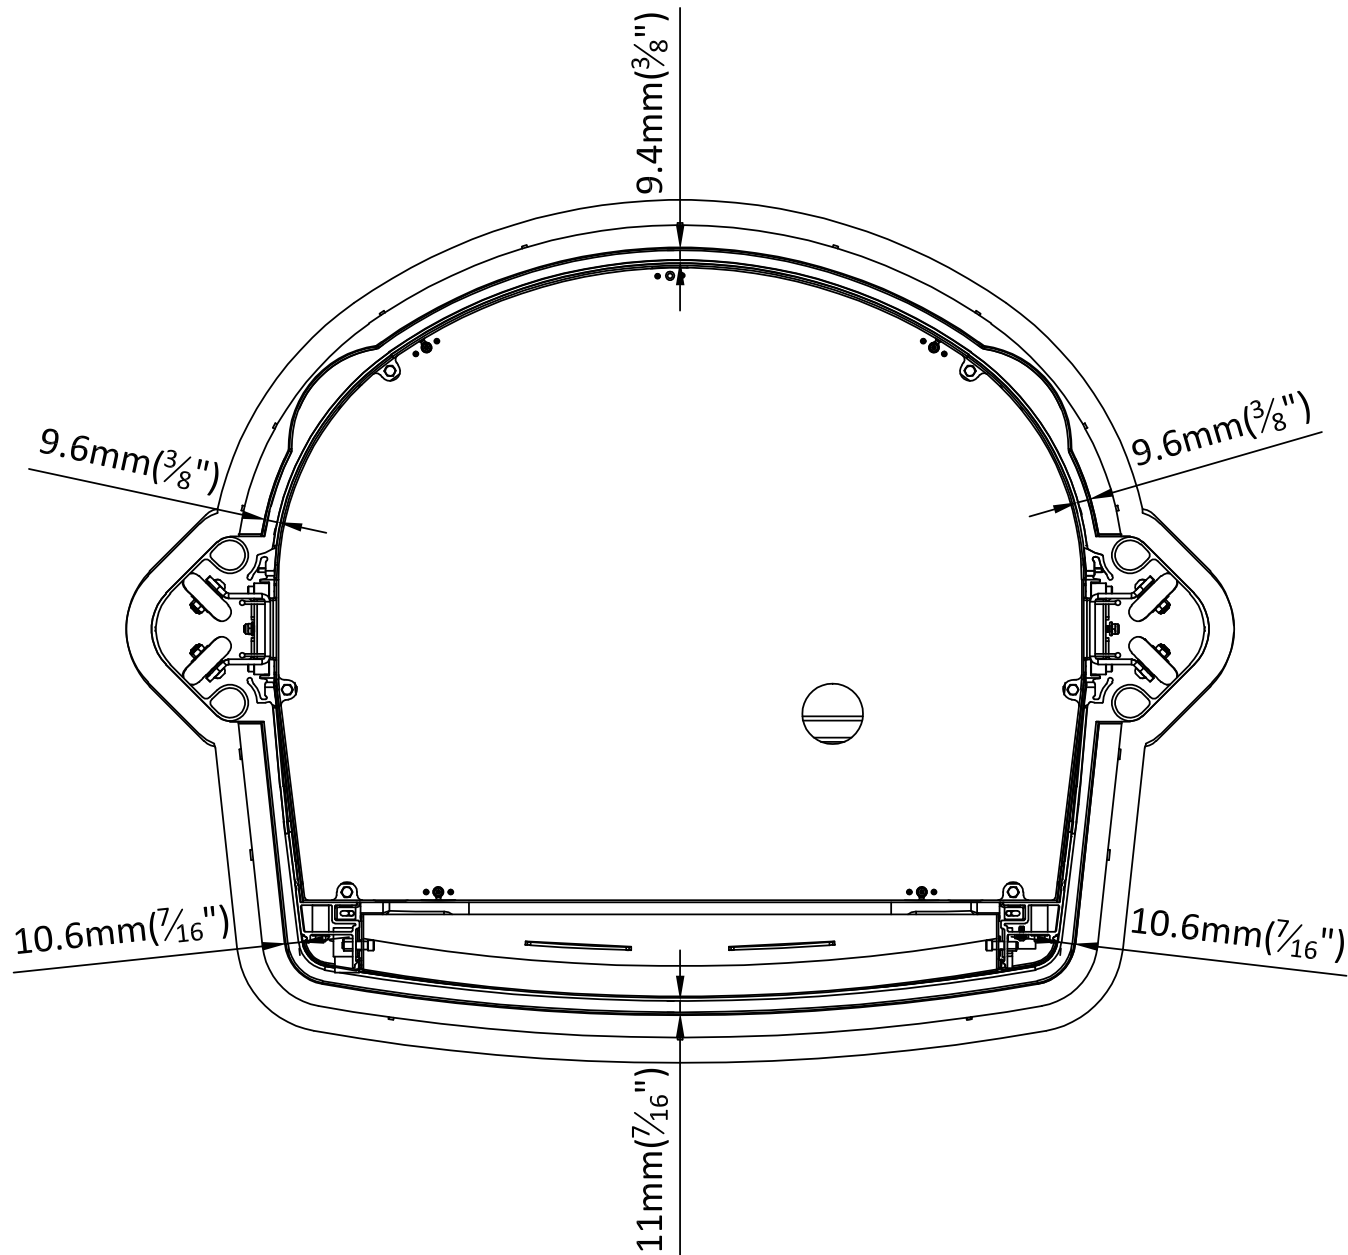

The information contained herein is the exclusive property of Stiltz Ltd. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Stiltz Ltd.



© Stiltz Ltd. 2018		TITLE	
Drawn Wagon Wang Date 07/11/2018		Car to Insert Clearance	
 DIMENSIONS IN MM UNLESS OTHERWISE NOTED THIRD ANGLE PROJECTION - AS 1100	A4	Dwg No LAYOUT. 12	
		PAGE 12 OF 12	
SCALE:			